


HOT PRESSURE WASHERS

HG/HD - HOT 2 GO SERIES: PORTABLE ELECTRIC POWERED, DIESEL FIRED

- ◆ Pressures From 1500 to 3000 PSI
- ◆ Water Flows up to 3.6 GPM
- ◆ Durable Industrial Electric Motors
- ◆ Quality Built Advanced Systems Engineered Design
- ◆ Supported by a Network of Service Professionals
- ◆ Certified by Industry Leaders

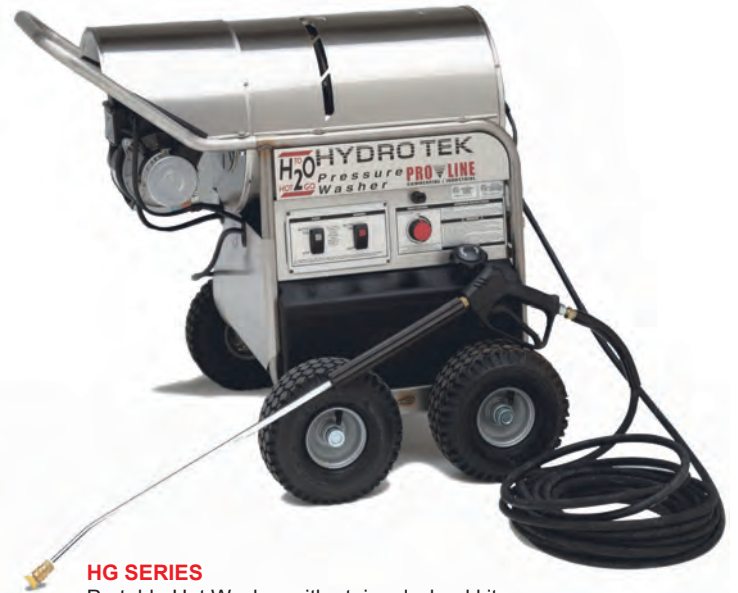

HG SERIES

Portable Hot Washer with optional wheel kit



HD SERIES

Portable hot Washer with Optional Wheel Kit



Cleans Fast & Outlasts

HYDRO PRO
POWER WASH PERFORMANCE

HG/HD HOT 2 GO PROLINE SERIES

PORTABLE HOT PRESSURE WASHERS AND STEAM CLEANERS



The Right Power Cleaner, Right Where You Need It!

Common Features

High Intensity Diesel Burners & Super Efficient Heating Coils:

The ultimate balance of power and efficiency in these uniquely designed "dual-pass" schedule 80 coils. Provides economical operation with consistent superior performance. Auto ignition adds peace of mind & ease of operation.

Stainless Steel Coil Housing & SS Inner Wrap:

Lifetime corrosion resistance, inside and out – unmatched coil protection, double wall protected to contain the intense heat of the burner providing optimal long life and performance.

Stainless Steel Frames and Panels:

Not just decorative flashes, these rugged and durable panels offer lifetime corrosion resistance and protection of your valuable investment from the harshest environments. Quick connects provide easy removal for full access to all major components and the Ultimate in serviceability.

Other Standard Features:

Pump cooling system prevents pump from overheating in bypass for worry free operation. Adjustable pressure unloader, safety relief valve, burst disc technology and temperature limit switch. Nozzles for various applications, 50' hose, gun and wand included. Heavy duty industrial motor with standard thermal overload protection. NEMA4-Water tight control panel with lighted switches.

HG Series (Hot 2 Go)

Automatic Start-up and Shut-down:

Operator has total control over the system from the trigger gun. This added convenience not only saves time and effort, it reduces ear of the pump, prevents the pump from running dry and produces an energy efficient system. Outperforms traditional manual on/off and pressure controlled auto start systems. (Not available on HG35015E1H and HG30004E2C)

4 Gal Fuel Tank with Filtration and Adjustable Temperature:

HeavyDuty "roto-molded" rust free fuel tanks with water separating fuel filter to protect against contaminated fuel.

Downstream Chemical Injection:

The HG series is equipped with downstream chemical injection that can be turned on and off right from the gun – no need for the operator to return to the machine. Chemicals and other additives are introduced after the pump eliminating the risk of pump damage. Includes panel mounted soap metering knob for easy adjustment.

HD Series (Hot 2 Go Heavy Duty)

Inlet Chemical Injection:

Inlet soap injection with precision chemical metering valve and float tank injects soap at full pressure for optimal cleaning effectiveness. Panel mounted controls enable the operator to vary the mixture of soap or other additives with ease.

Belt Driven Pump:

High torque, low RPM drive- cooler, quieter, continuous duty performance. These ceramic plunger triplex pumps feature oversized aluminum crankcases with special cooling fins for extended pump life and stainless steel valves, seats, springs and plunger rods for positive seating and increased performance.

7.5 Gal Fuel Tank with Filtration and Adjustable Temperature:

HeavyDuty "roto-molded" rust free fuel tanks with water separating fuel filter to protect against contaminated fuel. Extended run time reduces interruptions. Panel mounted adjustable temperature knob with steam setting increases cleaning effectiveness.



HG SERIES



HD SERIES

Specifications

Model	PSI	GPM	Temp.	HP	Voltage
HG SERIES					
HG15015E1H	1500	1.5	200	1.5	115v - 1ph 15a
HG15002E1C	1500	2	200	2	115v - 1ph 20a
HG35015E1H*	350	1.5	320	1.5	115v - 1ph 15a
HG22004E2H	2200	3.5	250	5	208/230v - 1ph
HG30004E2C	2900	3.4	250	6.5	230v - 1 ph

HD SERIES

HD10003E1H	1000	2.8	250	2	115v - 1ph 20a
HD15002E1H	1500	2	250	2	115v - 1ph 20a
HD20004E2H	2000	3.5	250	5	208/230v - 1ph
HD25004E2H	2500	3.6	250	6.5	230v - 1ph
HD25004E2C	2500	3.6	250	6.5	230v - 1ph
HD3000E2H	3000	3	250	6.5	230v - 1ph

* UL certification not available on this model

Optional Accessories...

Wet sandblast assembly, Hose and wand extensions, Wheel kits and stainless steel hose reels.

Specifications may vary, consult factory for custom models

DISTRIBUTED BY:



10418 Enterprise Drive Redlands CA 92374

Toll Free: (800) 274-9376 Fax: (909) 799-9888 www.hydroteksystems.com

HGHD PROLINE 2/05 Printed in the USA © 2005.