

# HOT PORTABLE/SKID WASHERS

SS/SC SERIES: GAS OR DIESEL POWERED, DIESEL FIRED



SS SERIES SHOWN WITH WHEEL KIT



SC PROLINE SERIES

**HYDRO TEK** **PRO**  
*POWER WASH PERFORMANCE*

*Cleans Fast & Outlasts*

[www.hydroteksystems.com](http://www.hydroteksystems.com)

# SS/SC PROLINE SERIES

## SELF CONTAINED HOT/COLD/STEAM PRESSURE WASHERS



### The Right Power Cleaner, Right Where You Need It!

#### Common Features

##### ■ Rugged "Pro-TECT-it" Frame:

The Ultimate in protection. Hydro Tek's unique "Pro-TECT-it" frame of 1 1/4", heavy gauge steel, with durable electrostatically applied powder coat finish. The built-in lifting eyes gives you greater flexibility and protection when moving the system. The SC30006DH "Pro-TECT-it" frame is constructed of 304 stainless steel.

##### ■ Stainless Steel Panels:

Not just decorative flashes, these rugged and durable panels offer lifetime corrosion resistance and protection of your valuable investment from the harshest environments. Keeps your machine looking like new for years to come. Quick connects provide easy removal for full access to all major components and the Ultimate in serviceability.

##### ■ Heating System:

The Ultimate balance of power, efficiency and corrosion resistance in this uniquely designed Hydro Tek schedule 80 coil. Rugged construction suitable for "over the road use" works in harmony with the double wall stainless steel, ceramic insulated housing. Virtually indestructible construction and industry leading performance — years of uninterrupted, worry free service.

##### ■ Industrial Engines:

Efficient OHV engines with electric key start, low oil shutdown, and cast iron cylinder for maximum duty and performance. The SC30006DH is equipped with a Diesel engine.

##### ■ Fuel Tanks:

Heavy Duty "roto-molded" rust free fuel tanks with fuel filter to protect against contaminated fuel. Extended run time (up to 8hrs.) eliminates interruptions.

##### ■ Total Relief Unloader - Remote Mounted:

Flow sensitive unloader allows pressure to build up gradually as trigger gun is activated eliminating "pressure spikes" and improving operator control and safety. When the gun is released, entire system pressure is relieved, enhancing system life and eliminating engine starting problems. The unloader is remote mounted eliminating heat exchange and vibration. Not available on 2-Gun or 4000 psi systems.

#### SS Series (Up to 5.5 GPM)

##### ■ Compact Design:

Engineered for versatility and portability. Skid with wheels can easily fit through 30" spaces and doors.

##### ■ Flexible, high intensity 12V Diesel Burner System:

Sophisticated 12V burner system transforms available power from system to fire the diesel burner. This efficient burner system offers an economical alternative to provide maximum burner performance. No outside power source is required.

##### ■ Gear Belt Drive or Direct Drive Pump:

High torque, "no slip" gear belt, low RPM drive — cooler, quieter, allows continuous performance. These industrial triplex, ceramic plunger pumps outperform the competition in longevity. Direct drive pumps are rated to pull from a water tank without the sacrificing performance.

#### SC Series (Up to 5-8 GPM)

##### ■ 2 Gun Compatible: (Available on SC40006 and SC30008 only)

Allows the operator to operate two pressure guns simultaneously, creating a multi-purpose machine, increasing efficiency and time. Unique split flow design balances pressure spikes and the adjustable flow allows the operator to conserve water.

##### ■ 110v Burner with On-Board 2900 watt Generator:

Provides automatic, high intensity ignition and reliable power for the heating system. Supplemental power outlets from the generator (GFCI Protected) offer the operator additional electrical power to run lights or accessories. High capacity 18 Gallon Deisel fuel tank decreases refueling and operator down time.

##### ■ Burner Output:


Super duty Wayne burner delivers 350,000 to 614,000 BTUs with the highest heating capability in its class.

##### ■ Belt Driven Pump:

High torque, V-belt driven pump low RPM, cooler and quieter operation for continuous duty performance.



SS SERIES

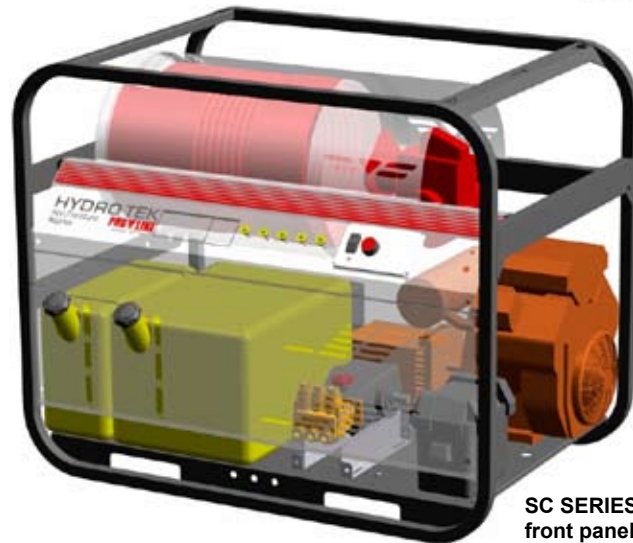

SC SERIES with optional front panel

### Specifications

Model	PSI	GPM	Temp.	HP	Engine
<b>SS SERIES</b>					
SS30003HH	3000	3	250 F	9	Honda Gas Direct*
SS32004HG	3200	4	250 F	13	Honda Gas Direct
SS40004VC	4000	4	250 F	16	Vanguard Gas Direct
SS30005VH	3000	4.8	250 F	16	Vanguard Gas Belt
SS35006VG	3500	5.5	250 F	21	Vanguard Gas Belt
<b>SC SERIES</b>					
SC30005VH	3000	4.8	200 F	16	Vanguard Gas
SC30006VG	3000	5.2	200 F	16	Vanguard Gas
SC35006KG	3500	5.5	200 F	20	Kohler Gas
SC35006HG	3500	5.5	200 F	20	Honda Gas
SC30006DH	3000	5.0	200 F	13.3	Kubota Diesel
SC40006KAF	4000	3 - 5.5	200 F	20	Kohler Gas
SC40006HAF	4000	3 - 5.5	200 F	24	Honda Gas
SC30008KAF**	3000	2 x 4	200 F	25	Kohler Gas

\* Pull start engine

\*\*Includes two guns, wands, hoses

#### Optional Accessories...

Wet sandblast assembly, Hose and wand extensions, Wheel kits, Stainless Steel hose reels, Machine covers.

#### DISTRIBUTED BY:



10418 Enterprise Drive Redlands CA 92374

Toll Free: (800) 274-9376 Fax: (909) 799-9888 www.hydroteksystems.com

SS / SC PROLINE 2/06 Printed in the USA © 2006.